AL3 M EBLA/EDLA-E series

Monobloc concept

Same concept as the EBLA/EDLA-D 11-14-16

In smaller sizes

4 – 6 - 8 kW

- Models with 3V BUH integrated
- BUH-less models available

Included in the outdoor unit :

- Switch box (incl hydro PCB)
- Pump
- Flow sensor
- 3V integrated BUH
- Water filter in stop valve
- Expansion vessel
- PHE

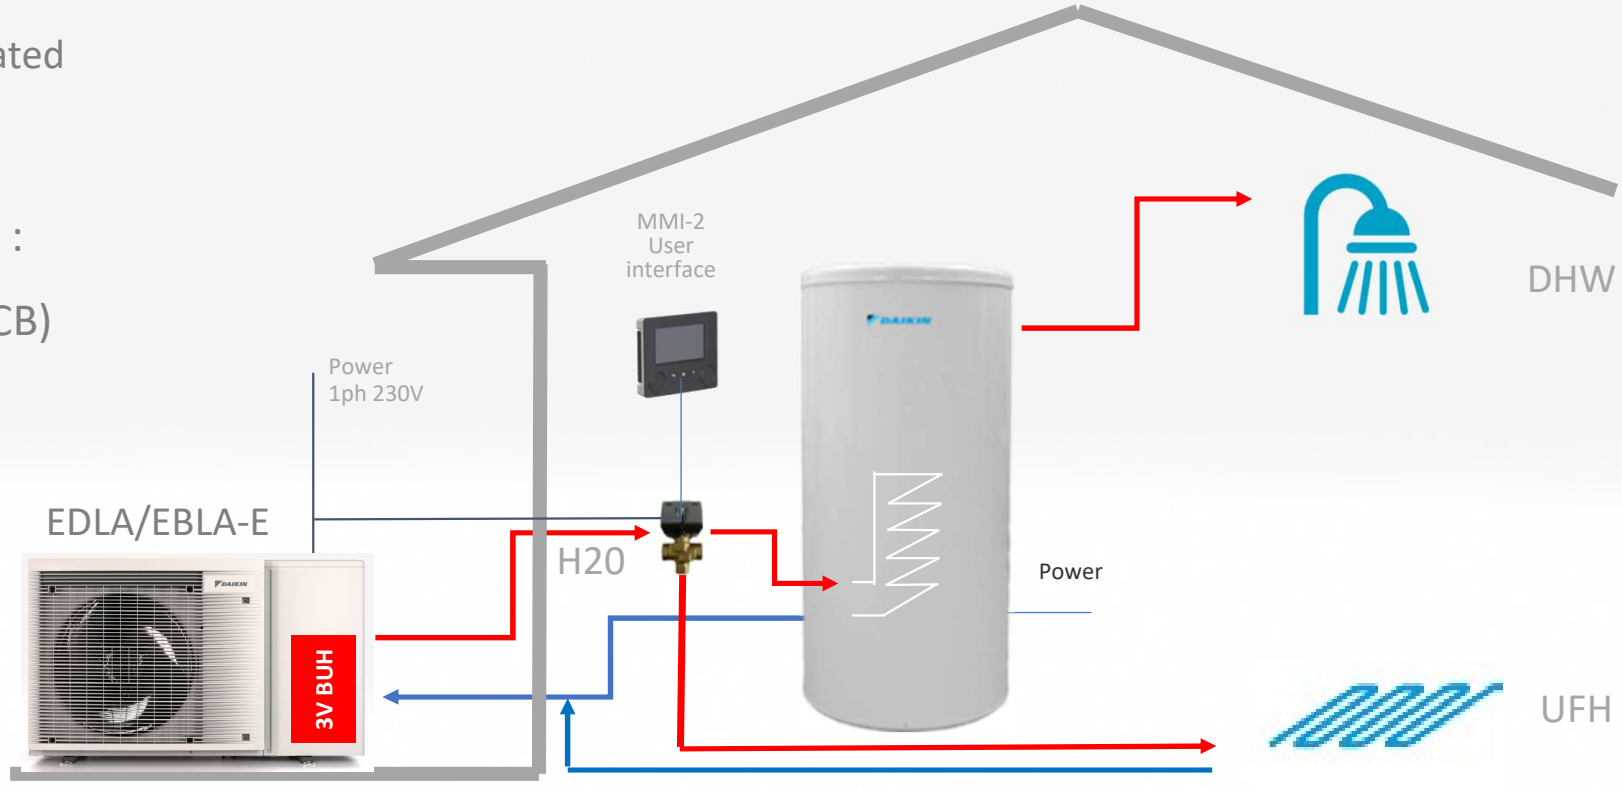

refrigerant circuit in outdoor unit

State of art controller



- Upload commissioning parameters with USB
- Remote changing of settings
- High resolution colour display
- AL3 MMI based for easy commissioning
- Standard delivered with the units (in the accessory bag)
- 160 x 130 x 25 mm
- Same as used for EBLA / EDLA –D class 9 - 11 - 14 - 16

EBLA / EDLA-E series

AL3 M EBLA/EDLA-E series

BRC1HHDA* Madoka controller





BRC1HHDAW



BRC1HHDAS



BRC1HHDAK

DAIKIN

AL3 M EBLA/EDLA-E series

Maximum heating capacity – integrated value

Maximum heating capacity - integrated value

	LWC [°C]	30°C		35°C		40°C		45°C		50°C		55°C	
	T_{amb} [°C]	HC [kW]	PI [kW]	HC [kW]	PI [kW]	HC [kW]	PI [kW]	HC [kW]	PI [kW]	HC [kW]	PI [kW]	HC [kW]	PI [kW]
E(B/D)LA08E*	-20	6,22	3,21	6,14	3,43	6,06	3,66	5,98	3,89	5,89	4,11		
	-15	6,62	2,88	6,58	3,16	6,53	3,44	6,48	3,72	6,33	4,02	6,33	4,27
	-7	7,27	2,37	7,28	2,73	7,29	3,08	7,30	3,44	7,02	3,86	6,74	4,28
	-2	7,23	2,11	7,24	2,41	7,26	2,72	7,27	3,02	7,05	3,37	6,83	3,72
	2	7,20	1,90	7,22	2,16	7,23	2,42	7,25	2,68	7,07	2,97	6,90	3,27
	7	9,63	1,84	9,37	2,08	9,12	2,31	8,86	2,55	8,74	3,00	8,61	3,45
	12	9,52	1,49	9,21	1,71	8,91	1,93	8,60	2,14	8,42	2,42	8,25	2,71
	15	9,22	1,30	8,82	1,50	8,42	1,70	8,02	1,90	7,79	2,16	7,55	2,42
	20	8,71	0,97	8,16	1,14	7,60	1,32	7,04	1,49	6,72	1,71	6,40	1,93
E(B/D)LA06E*	-20	5,19	2,65	5,13	2,82	5,08	3,00	5,02	3,17	5,00	3,44		
	-15	5,59	2,38	5,56	2,60	5,53	2,83	5,50	3,05	5,22	3,35	4,91	3,54
	-7	6,24	1,95	6,25	2,25	6,25	2,56	6,26	2,86	5,58	3,21	4,91	3,54
	-2	6,22	1,72	6,20	1,97	6,19	2,22	6,17	2,48	5,74	2,75	5,32	3,03
	2	6,20	1,53	6,17	1,74	6,13	1,95	6,10	2,17	5,87	2,39	5,65	2,61
	7	7,92	1,45	7,74	1,63	7,57	1,82	7,40	2,01	7,22	2,26	7,03	2,51
	12	7,79	1,06	7,52	1,27	7,26	1,47	6,99	1,68	6,76	1,92	6,54	2,16
	15	7,60	0,95	7,25	1,13	6,89	1,30	6,54	1,48	6,17	1,70	5,81	1,92
	20	7,29	0,77	6,79	0,89	6,29	1,02	5,78	1,14	5,19	1,33	4,60	1,51
E(B/D)LA04E*	-20	4,38	2,43	4,29	2,45	4,21	2,47	4,13	2,48	3,99	2,82		
	-15	4,78	2,14	4,71	2,24	4,64	2,35	4,58	2,45	4,25	2,78	3,94	2,98
	-7	5,43	1,66	5,38	1,91	5,34	2,16	5,30	2,40	4,65	2,72	4,00	3,04
	-2	5,49	1,48	5,43	1,68	5,36	1,87	5,30	2,07	4,85	2,33	4,40	2,59
	2	5,60	1,40	5,46	1,49	5,38	1,64	5,30	1,80	5,01	2,02	4,73	2,23
	7	6,65	1,11	6,41	1,30	6,25	1,48	6,08	1,65	5,91	1,84	5,73	2,03
	12	6,32	0,86	6,07	1,01	5,76	1,15	5,46	1,29	5,23	1,48	4,99	1,67
	15	6,04	0,73	5,72	0,86	5,40	1,00	5,08	1,13	4,62	1,28	4,17	1,42
	20	5,49	0,50	5,15	0,63	4,80	0,75	4,45	0,87	3,62	0,94	2,80	1,01

Symbols

CC	Cooling capacity at maximum operating frequency, measured according to EN 14511.
HC	Heating capacity at maximum operating frequency, measured according to EN 14511
PI	Power input is the total input of indoor and outdoor units, including the circulation pump; according to EN 14511.
LWE	Leaving water evaporator temperature [°C]
LWC	Leaving water condensor temperature [°C]
Tamb	Ambient temperature; RH (heating) = 85%

Conditions

Cooling capacity

Capacity according to standard EN 14511 and valid for chilled water range ΔT = 3~8°C.

Capacity values may not be extrapolated below 7°C leaving water temperature.

Heating capacity

Capacity according to standard EN 14511 and valid for heated water range ΔT = 3~8°C.

Power input

Power input is the total input of indoor and outdoor units, including the circulation pump; according to EN 14511.

Notes

The capacity and the power input are valid for V3 models at 230 V.

The capacity and the power input are at maximum operation.

DAIKIN